



For more information,
please scan this code:



HG323AC-B

1*XPON+2*GE+1*POTS+1*USB3.0+WiFi5 HGU ONT

Key Features:

- XPON Dual Mode-Auto-adaptive EPON/GPON
- Support EasyMesh protocol
- WiFi5 Dual Band 1200Mbps
- IPv4/IPv6 Stack
- Support SIP protocol



Introduction:


HG323AC-B (2GE+1POTS+WiFi5 XPON HGU ONT) is a broadband access device specially designed to meet the needs of fixed network operators for FTTH and triple play services.

The ONT is based on high-performance chip solutions, supports XPON dual-mode technology (EPON and GPON), and also supports IEEE802.11b/g/n/ac WIFI technology and other Layer 2/Layer 3 functions, providing data service for carrier-grade FTTH applications. In addition, the ONT also supports the OAM/OMCI protocol, and we can configure or manage various services of the ONT on the VSOL OLT.

The ONT has high reliability, is easy to manage and maintain, and has QoS guarantees for various services. It conforms to a series of international technical standards such as IEEE802.3ah and ITU-T G.984.

Application Chart:

EasyMesh for Full-coverage

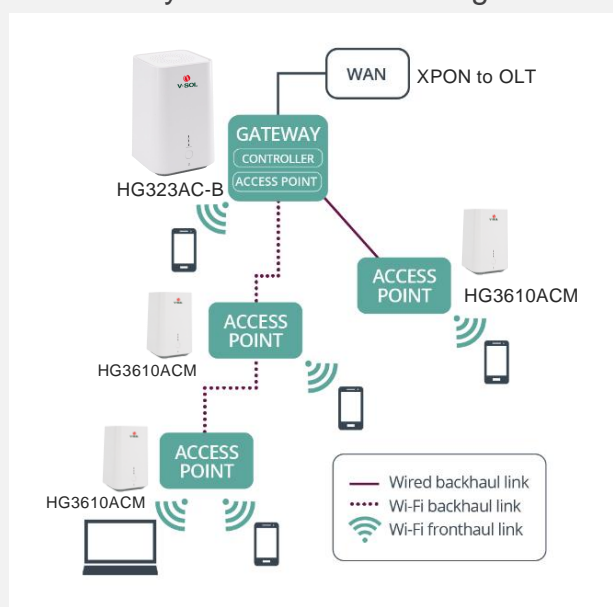

○ Hardware Parameter

Dimension	• 115mm×115mm×180m(L×W×H)
Net weight	• 625g
Operating condition	• Operating temp: 0 ~ +50°C • Operating humidity: 10 ~ 90% (non-condensing)
Storing condition	• Storing temp: -30 ~ +60°C • Storing humidity: 10 ~ 90% (non-condensing)
Power adapter	• DC 12V,1.5A, external AC-DC • power adaptor
Power supply	≤12W
Interface	2GE+1POTS+1USB3.0+WiFi5
Indicators	5, For Status of PON/LOS,WiFi,TEL, LAN1,LAN2

○ Interface Parameter

PON interface	<ul style="list-style-type: none"> • 1XPON port(EPON PX20+ and GPON Class B+) • SC single mode, SC/UPC connector • TX optical power: 0~+4dBm • RX sensitivity: -27dBm • Overload optical power: -3dBm(EPON) or -8dBm(GPON) • Transmission distance: 20KM • Wavelength: TX 1310nm, RX1490nm
User interface	<ul style="list-style-type: none"> • 2 *GE, Auto-negotiation,RJ45 ports • 1*POTS RJ11 Connector for VoIP • 1*USB3.0 for Printer&Storage • 1*WPS button for quickly pairing two WiFi device.
WLAN interface	<ul style="list-style-type: none"> • Compliant with IEEE802.11b/g/n/ac • WiFi:2.4GHz 2×2, 5.8GHz 2×2, 5dBi antenna, rate up to 1.167Gbps,Multiple SSID • TX power: 2.4GHz: 23dBm; 5GHz: 24dBm • RX power: 2.4GHz: HT40-MCS7 -72dBm; 5GHz: VHT80 MCS9 <-62dBm

○ Function Data

O&M	<ul style="list-style-type: none"> • OAM/OMCI,Telnet,WEB,TR069 • Support full management of HGU functions by VSOL OLT
Connect Mode	Support bridge, router & bridge/router mixed mode
QoS	<ul style="list-style-type: none"> • Support 4 queues • Support SP, WRR, 802.1P and DSCP
Data Service Functions	<ul style="list-style-type: none"> • Full speed non-blocking switching • 2K MAC address table • 64 full range VLAN ID • Support VLAN tag, untag, transparent, trunk, translation mode • Integrated port monitoring, port mirroring, port rate limiting, port SLA, etc • Support auto polarity detection of Ethernet ports (AUTO MDIX) • Support IGMP v1/v2/v3 snooping/proxy and MLD v1/v2 snooping/proxy
Wireless	<ul style="list-style-type: none"> • Integrated 802.11b/g/n/ac • Authentication:WEP/WAP-PSK(TKIP)/WAP2-PSK(AES) • Modulation type:DSSS,CCK and OFDM • Encoding scheme:BPSK,QPSK,16QAM and 64QAM • Easymesh
VoIP	<ul style="list-style-type: none"> • SIP and IMS SIP • G.711a/G.711u/G.722/G.729 Codec • Echo cancellation,VAD/CNG,DTMF Relay • T.30/T.38 FAX • Caller Identification/Call Waiting/Call Forwarding/Call Transfer/Call Hold/3-way Conference • Line testing according to GR-909
L3	<ul style="list-style-type: none"> • IPv4, IPv6 and IPv4/IPv6 dual stack • DHCP/PPPOE/Static • Static route, DHCP Server • NAT/DMZ/DDNS/Virtual Server
Security	<ul style="list-style-type: none"> • Support Firewall • Support Mac filter Based on MAC or URL • Support ACL

Ordering Information:

Product Name	Product Description	Accessories
HG323AC-B	2GE+1POTS+1USB3.0+WiFi5	AC-DC power adaptor: DC12V/1.5A